


LINE PROFILES

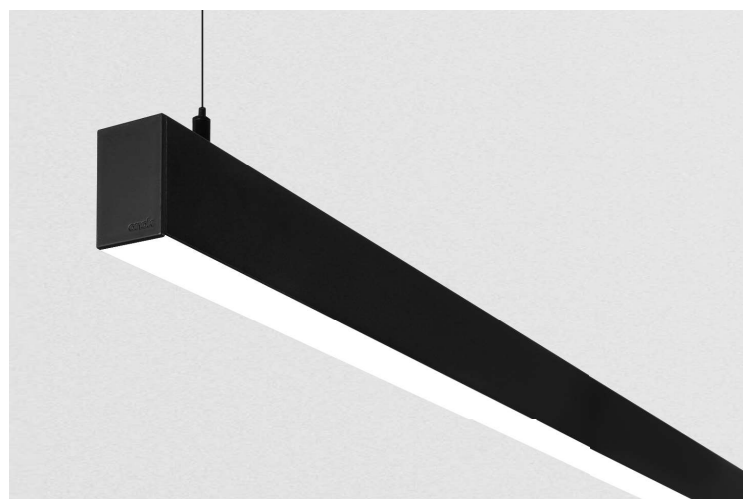


	W	mm	mA	TEMP	LUM	CRI
LINE_07	14	705	250	3.000K	2.325	>85
				4.000K	2.499	
LINE_11	22	1.125	250	3.000K	3.720	>85
				4.000K	3.999	
LINE_14	28	1.405	250	3.000K	4.650	>85
				4.000K	4.998	
LINE_18	35	1.825	250	3.000K	6.045	>85
				4.000K	6.498	
LINE_22	45	2.245	250	3.000K	7.440	>85
				4.000K	7.998	
LINE_28	56	2.810	250	3.000K	9.300	>85
				4.000K	9.997	

Para medidas mas largas de 2810 mm, utilizar combinaciones de perfiles.
For longer measurements of 2810 mm You have to use combination of different profiles.


IMPORTANTE: Una alimentación para máximo 10 metros. / **ATTENTION:** Maximum 10 meters per one power supply.

TEC.DRAWINGS


Pendant Version

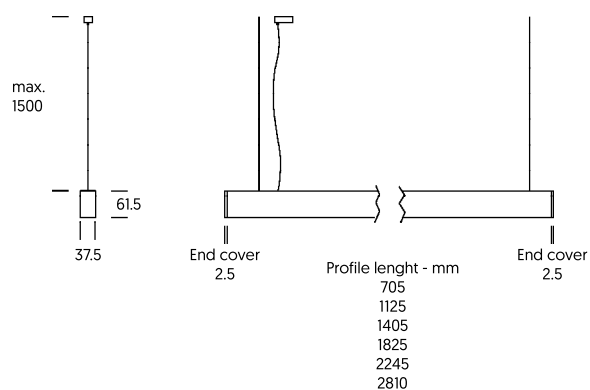

Surface Version

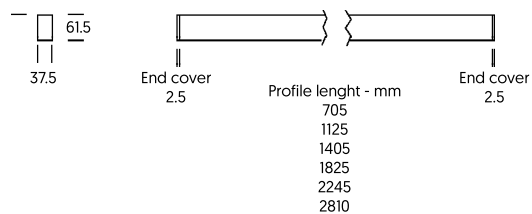

Pendant Bar

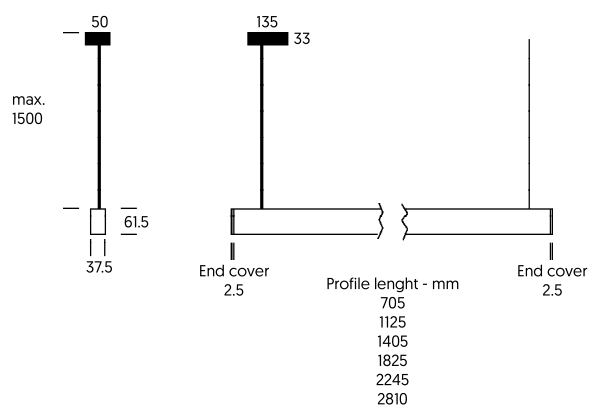

**Se debe definir longitud de barra, el usuario no puede modificar la longitud /
Bar length must be defined, the user cannot modify the length.



LED	⊕	230V	IP20	Ⓛ 60,000h L80	McAdam C3				
≈ 14W	> 2.000lm	LNEX A 07	• •	9	• •				
≈ 22W	> 3.000lm	LNEX A 11	• •	9	• •				
≈ 28W	> 4.000lm	LNEX A 14	• •	9	• •				
≈ 36W	> 6.000lm	LNEX A 18	• •	9	• •				
≈ 45W	> 7.000lm	LNEX A 22	• •	9	• •				
≈ 56W	> 9.000lm	LNEX A 28	• •	9	• •				

BASIC OPTIONS

NO DIM	N	No Dimmable				
3K	3	3000K				
9	9	120°				
A	A	Ice Difusser				
WS	WS	Satin White	LNEX A	• •	N 3 9 A	WS
BS	BS	Satin Black	LNEX A	• •	N 3 9 A	BS

CUSTOMIZE OPTIONS

LED CONTROL


PUSH	F	Dimmable Push	LNEX A	• •	F	• 9	• •
DALI	D	Dimmable Dali	LNEX A	• •	D	• 9	• •

LED COLOR TEMPERATURE

4K	4	4000K	LNEX A	• •	• 4	9	• •
-----------	----------	-------	--------	-----	------------	---	-----


COMPLEMENTS CODES
PENDANT VERSION

1.5Metros estandar - Standar 1.5 Meters
*5Metros opcional - Optional 5 Meters




Interior Joint NO-DIM
1.5Meters LNEUXNXXELUN1
2.0Meters LNEUXNXXELUN2


Interior Joint DIM
1.5Meters LNEUXDXXELUD1
2.0Meters LNEUXDXXELUD2



Electrical Susp. DIM
1.5Meters LNEKKSEDI50BS Black
1.5Meters LNEKKSEDI50WS White
*5Meters LNEKKSEDI500BS Black
*5Meters LNEKKSEDI500WS White



Electrical Susp. NO-DIM
1.5Meters LNEKKSEN500BS Black
1.5Meters LNEKKSEN150WS White
*5Meters LNEKKSEN500BS Black
*5Meters LNEKKSEN500WS White





Kit Suspension
1.5Meters LNEKKSUP150BS Black
1.5Meters LNEKKSUP150SS Silver
*5Meters LNEKKSUP500BS Black
*5Meters LNEKKSUP500SS Silver




Kit Susp. Bar
NO DIM LNEKBSENI50BS Black
NO DIM LNEKBSENI150WS White
DALI LNEKBSEDI50BS Black
DALI LNEKBSEDI150WS White

SINGLE VERSION

Line 07 - 14 - 18 - 22 - 28

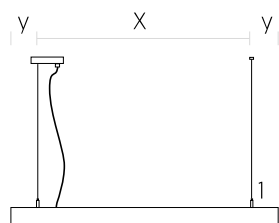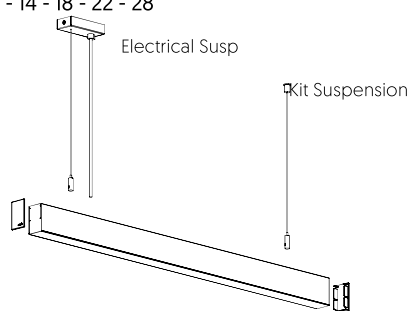


Line 07-11-14-18-22

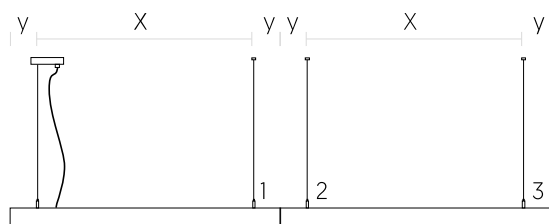

Line 32-37-42-46-50-66

CONTINUOUS VERSION

Line 32 -37 -42- 46 - 50 -56

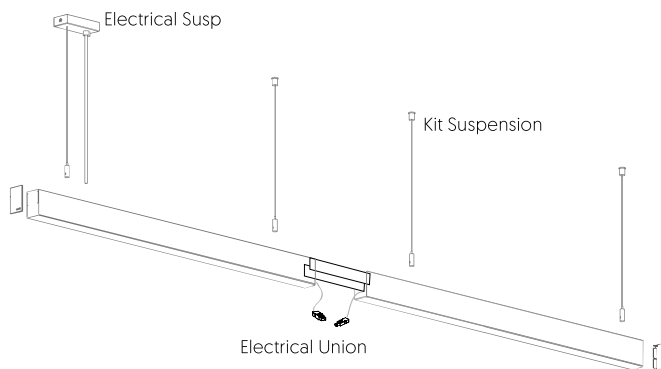


GUÍA COMPLEMENTOS/ COMPLEMENTS GUIDE


Ref.	Lenght	Elect Susp.	Kit Susp.	Ele.Union	X	Y
Line 07	07 705 mm	1	1	-	605	50
Line 11	11 1.125 mm	1	1	-	1025	50
Line 14	14 1.405 mm	1	1	-	1.305	50
Line 18	18 1.825 mm	1	1	-	1.725	50
Line 22	22 2.245 mm	1	1	-	2.125	50
Line 28	28 2.810 mm	1	1	-	2.710	50
Line 32	14+18 3.230 mm	1	3	1.5m		50
Line 37	18+18 3.650 mm	1	3	2m		50
Line 42	28+14 4.215 mm	1	3	1.5m		50
Line 46	28+18 4.635 mm	1	3	1.5m		50
Line 50	28+22 5.055 mm	1	3	1.5m		50
Line 56	28+28 5.620 mm	1	3	1.5m		50

COMPLEMENTS CODES

SURFACE VERSION




Interior Joint NO-DIM
1.5Meters LNEUXNXXELUN1
2.0Meters LNEUXNXXELUN2



Interior Joint DIM
1.5Meters LNEUXDXXELUD1
2.0Meters LNEUXDXXELUD2


SINGLE VERSION

Line 07 - 14 - 18 - 22 - 28



CONTINUOUS VERSION

Line 32 - 37 - 42 - 46 - 50 - 56

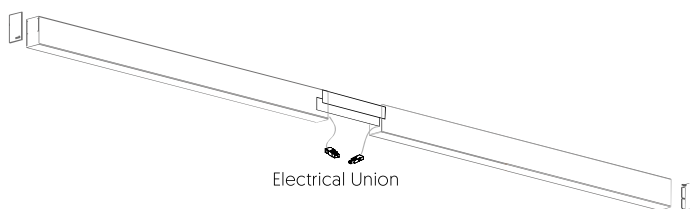


GUÍA COMPLEMENTOS/ COMPLEMENTS GUIDE

Ref.		Lenght (L)	Ele. Union
Line 07	[07]	710 mm	-
Line 11	[11]	1.135 mm	-
Line 14	[14]	1.415 mm	-
Line 18	[18]	1.835 mm	-
Line 22	[22]	2.255 mm	-
Line 28	[28]	2820 mm	-
Line 32	[14+18]	3.240 mm	1.5m
Line 37	[18+18]	3.660 mm	2m
Line 42	[28+14]	4.225 mm	1.5m
Line 46	[28+18]	4.645 mm	1.5m
Line 50	[28+22]	5.065 mm	1.5m
Line 56	[28+28]	5.630 mm	1.5m

ACCESSORIES

LINE Q-CORNER

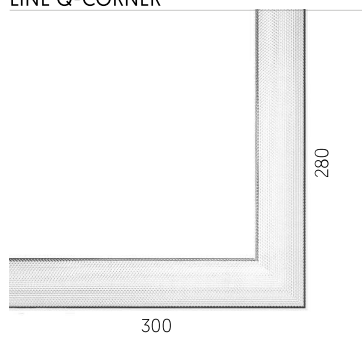

≈ 10W >1.660lm CRI>85

LED 230V IP20 INT 60.000h L80 McAdam C3

+ No - Dim
 + Dim - Push
 + Dim - Dali
 + 3000K
 + 4000K
 + Ice Difusser
 + Satin White
 + Satin Black

NO DIM PUSH DALI 3K 4K X A WS BS