


# 265/C IP65 RECESSED



	W	mA	TEMP	LUM	CRI
6W	6.2	350	2.700K	570	>90
			3.000K	595	
			4.000K	635	
10W	10.4	300	2.700K	1.005	>95
			3.000K	1.070	
			4.000K	1.135	



## TEC.DRAWINGS

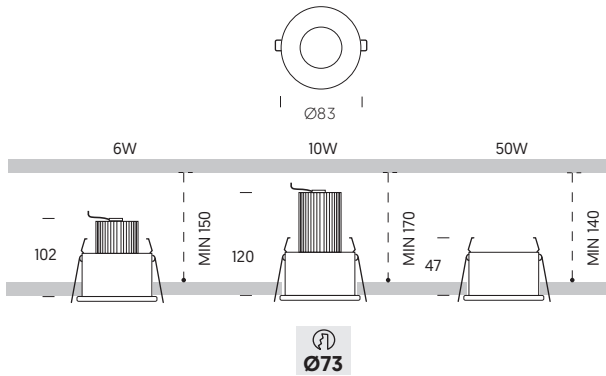

GU 10	230V	MAX 50W	IP65 EXT	IP20 INT								
					265C	E	50	X	X	X	A	WS
					265C	E	50	X	X	X	A	BS

GU 5.3	12V	MAX 50W	IP65 EXT	IP20 INT								
					265C	D	50	X	X	X	A	WS
					265C	D	50	X	X	X	A	BS

LED	230V	IP65 EXT	IP20 INT	50.000h L90/B10	McAdam C2									
						≈ 6W > 600lm	265C	A	06	.	.	.	.	..
						≈ 10W > 1000lm	265C	A	10	.	.	.	.	..

## BASIC OPTIONS

<b>NO DIM</b>	<b>N</b>	No Dimmable								
<b>3K</b>	<b>3</b>	3000K								
<b>4</b>	<b>4</b>	40°								
<b>A</b>	<b>A</b>	Ice Difusser								
<b>WS</b>	<b>WS</b>	Satin White	265C	A	..	<b>N</b>	<b>3</b>	<b>4</b>	<b>A</b>	<b>WS</b>
<b>BS</b>	<b>BS</b>	Satin Black	265C	A	..	<b>N</b>	<b>3</b>	<b>4</b>	<b>A</b>	<b>BS</b>

## CUSTOMIZE OPTIONS

<b>LED CONTROL</b>										
<b>PUSH</b>	<b>F</b>	Dimmable Push	265C	A	..	<b>F</b>	.	.	.	..
<b>DALI</b>	<b>D</b>	Dimmable Dali	265C	A	..	<b>D</b>	.	.	.	..
<b>LED COLOR TEMPERATURE</b>										
<b>2.7K</b>	<b>2</b>	2700K	265C	A	..	.	<b>2</b>	.	.	..
<b>4K</b>	<b>4</b>	4000K	265C	A	..	.	<b>4</b>	.	.	..
<b>LED BEAM ANGLE</b>										
<b>1</b>	<b>1</b>	16°	265C	A	..	.	.	.	<b>1</b>	..
<b>2</b>	<b>2</b>	24°	265C	A	..	.	.	.	<b>2</b>	..

Wifi or Bluetooth version and other colors, please consult it.