

# ALPHA

NEW  
Added



[www.unilamp.co.th/en/p/alpha](http://www.unilamp.co.th/en/p/alpha)



## SPOTLIGHT



**ALPHA** is a family of outdoor spot lights / flood lights engineered from scratch. The primary shapes and overall small dimensions makes it possible to install ALPHA in most professional and residential lighting applications. High quality polycarbonate optics provide accurate beam control and offer a wide selection of light distribution. ALPHA can be customized with accessories such as honeycombs, shields and various mounting solutions for poles and surfaces. The minimized amount of needed tools and usage of quick connectors simplifies the installation.

**NEW** ALPHA Square (INTEGRATED DRIVER)



**NEW** ALPHA Square - ID Arm



INPUT OPTION



### Specification

- Designed, Manufactured and tested according to IEC 60598.
- LM6 Die Cast Aluminium body.
- Stainless steel screws.
- Nano Ceramic surface conversion.
- Double layer coating.
- Safety glass cover.
- Post-cured silicone gasket.
- High quality LED module.
- Available with integrated driver or remote driver.
- Weather proof TPE grommet.
- Installation must be carried out according to the enclosed pro manual.

### Available Color

- Black (replace the last 2 digits of ordering code with 0)
- Graphite (replace the last 2 digits of ordering code with 1)
- Dark Grey (replace the last 2 digits of ordering code with 2)
- Aluminium Silver (replace the last 2 digits of ordering code with 3)
- White (replace the last 2 digits of ordering code with 4)
- Wooden Brown (replace the last 2 digits of ordering code with 5)

MERCURE IBIS, BANGKOK - THAILAND






# ALPHA

MERCURE IBIS, BANGKOK - THAILAND




Micro ALPHA Round  
CC / CV Spotlight



Micro ALPHA Round Snoot  
CC / CV Spotlight

**NEW!**



FURNITURE SHOP, HYDERABAD - INDIA

## Micro ALPHA Round

### SPOTLIGHT

Micro ALPHA Round - CV Spotlight / 5927 (Constant Voltage)

Micro ALPHA Round - CC Spotlight / 5928 (Constant Current)

Micro ALPHA Round Snoot - CV (Constant Voltage) **New!**

Micro ALPHA Round Snoot - CC / 5915 (Constant Current) **New!**


#### Luminaire Performance

90 - 370 lm

4.5 - 4.6 W

20 - 82 lm/W

#### Beam Options




#### Color Temperature

2700K/ 3000K/ 4000K

#### Controller

Remote Driver On-Off/ DALI


#### Accessories

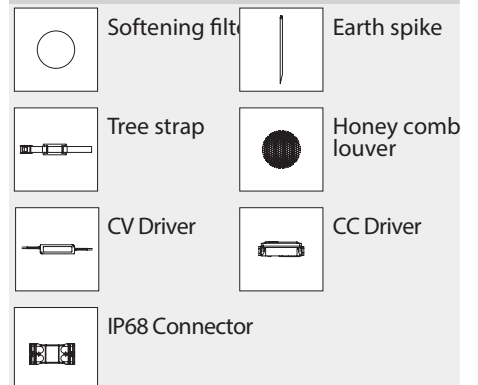




# ALPHA


Mini ALPHA Round




Mini ALPHA Round  
Gear / Gear CVDA



Mini ALPHA Round  
Gear / Gear CVDA



Mini ALPHA Round  
Gear Arm / Gear Arm CVDA



## Mini ALPHA Round

### SPOTLIGHT

Mini ALPHA Round / 5921

Mini ALPHA Round - Gear / 5922

Mini ALPHA Round - Gear CVDA / 5922

Mini ALPHA Round - Gear Arm / 5923

Mini ALPHA Round - Gear Arm CVDA / 5923


#### Luminaire Performance

710-1290 lm

10 - 17 W

58 - 94 lm/W

#### Beam Options



#### Color Temperature

2700K/ 3000K/ 4000K

#### Controller

Remote Driver On-Off/ 1-10V/ DALI


Built-in Driver On-Off/ 1-10V/ DALI

#### Accessories


	Honey comb louver		Softening filter
	Earth spike		Tree strap
	Pre-wired cable		Pole clamp
	Mounting Arm		Anchor bolt
	Aluminium pole		Steel pole
	CC Driver		CV Driver
	IP68 Connector		Glare Shield Cap

\*Please see Poles & Anchor bolt section for pole mounting options


Medium ALPHA Round




Medium ALPHA Round Gear



Medium ALPHA Round Gear



Medium ALPHA Round Gear Arm

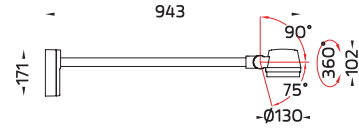

## Medium ALPHA Round

### SPOTLIGHT

Medium ALPHA Round / 5924

Medium ALPHA Round - Gear / 5925

Medium ALPHA Round - Gear Arm / 5926


#### Luminaire Performance

1380 - 2440 lm

19 - 32 W

45 - 96 lm/W

#### Beam Options



#### Color Temperature

2700K/ 3000K/ 4000K/ RGBW

#### Controller

Remote Driver On-Off/ 1-10V/ DALI

Built-in Driver On-Off/ 1-10V/ DALI

Remote Driver RGBW DALI

#### Accessories


	Honey comb louver		Softening filter
	Earth spike		Tree strap
	Pre-wired cable		Pole clamp
	Mounting Arm		Anchor bolt
	Aluminium pole		Steel pole
	CC Driver		IP68 Connector
	Glare Shield Cap		RGBW DALI Driver

\*Please see Poles & Anchor bolt section for pole mounting options




# ALPHA


Mini ALPHA Square




Mini ALPHA Square - ID




Mini ALPHA Square - ID Arm




Mini ALPHA Square Gear / Gear CVDA



Mini ALPHA Square Gear / Gear CVDA



Mini ALPHA Square Gear Arm / Gear Arm CVDA

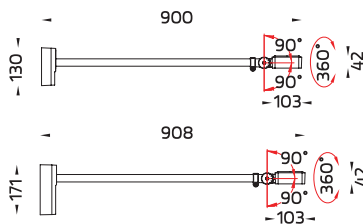

## Mini ALPHA Square

### SPOTLIGHT

Mini ALPHA Square / 5943

Mini ALPHA Square - ID / 5960

**New!**

Mini ALPHA Square - ID Arm / 5961

**New!**

Mini ALPHA Square - Gear / 5945

Mini ALPHA Square - Gear CVDA / 5945

Mini ALPHA Square - Gear Arm / 5946

Mini ALPHA Square - Gear Arm CVDA / 5946

#### Luminaire Performance

430 - 1270 lm

8 - 17 W

47 - 84 lm/W

#### Beam Options

Narrow

Medium

Wide

Elliptical H

Elliptical V



#### Color Temperature

2700K/ 3000K/ 4000K

#### Controller

Remote Driver On-Off/ 1-10V/ DALI  
Built-in Driver On-Off/ 1-10V/ DALI

#### Accessories




	Honey comb louver		Softening filter
	Earth spike		Tree strap
	Pre-wired cable		Pole clamp
	Mounting Arm		Anchor bolt
	Aluminium pole		Steel pole
	CC Driver		CV Driver
	IP68 Connector		Glare Shield Cap

\*Please see Poles & Anchor bolt section for pole mounting options

Medium ALPHA Square



Medium ALPHA Square  
Gear Arm / Gear Arm CVDA

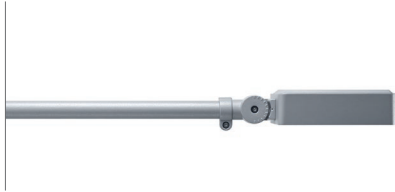

## Medium ALPHA Square

### SPOTLIGHT

Medium ALPHA Square / 5944
Medium ALPHA Square - Gear Arm / 5947
Medium ALPHA Square - Gear Arm CVDA / 5947
<b>Luminaire Performance</b>
1510 - 2820 lm
19 - 35 W
66 - 101 lm/W
<b>Beam Options</b>
Narrow Medium Wide Elliptical H Elliptical V
<b>Color Temperature</b>
2700K/ 3000K/ 4000K
<b>Controller</b>
Remote Driver DALI
Built-in Driver On-Off/ DALI

### Accessories

	Honey comb louver		Softening filter
	Earth spike		Tree strap
	Pre-wired cable		Pole clamp
	Mounting arm		Anchor bolt
	Aluminium pole		Steel pole
	CV Driver		IP68 Connector
	Glare Shield Cap		

\*Please see Poles & Anchor bolt section for pole mounting options