



FAMILIA MICRO
SISTEMAS

onok



MICRO
LINEAR SYSTEMS




	W	mm	v	TEMP	LUM	CRI
MICX_10	21	1000	24V	3.000K	2.100	>90
				4.000K	2.450	
MICX_15	32	1500	24V	3.000K	3.150	>90
				4.000K	3.675	
MICX_20	42	2000	24V	3.000K	4.200	>90
				4.000K	4.900	
MICX_25	53	2500	24V	3.000K	5.250	>90
				4.000K	6.125	

Flujos lumínicos / Flujos lumínicos




TEC.DRAWINGS


Pendant version

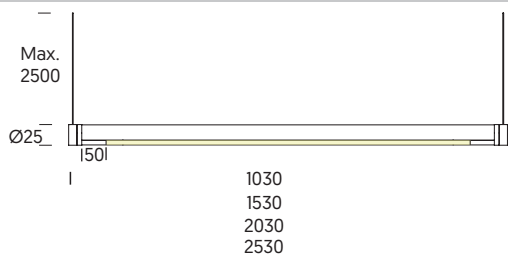


Wall Version

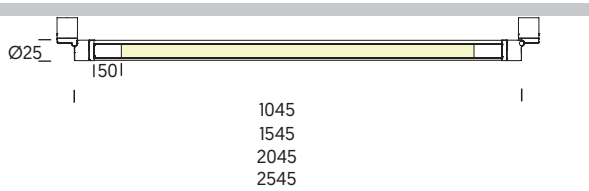

Wall-Pendant Version

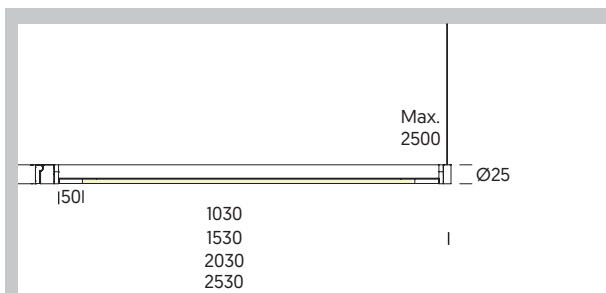

Floor Version

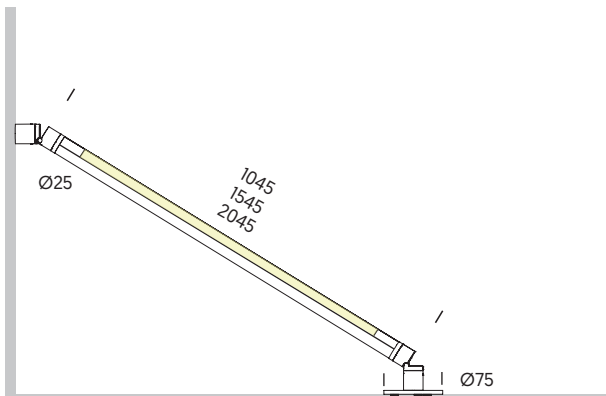

PERFIL / PROFILE

Configurador/ Configurator



24V

IP20



Micro Profile		Longitud / Lenght	Led Color Temperat.	Led Diffuser /Difusor	Installation/ Instalación	Finish / Acabado	
MICX	A	10 <small>1.0m</small>	X	3 <small>3000k</small>	A	P <small>Pendant</small>	BS <small>Black</small>
		15 <small>1.5m</small>		4 <small>4000k</small>		W <small>Wall</small>	
		20 <small>2.0m</small>				X <small>Wal - Pen</small>	
		25 <small>2.5m</small>				T <small>Floor</small>	





FLORON
LINEAR SYSTEMS


CE




Pendant and Vertical

Wall and Floor



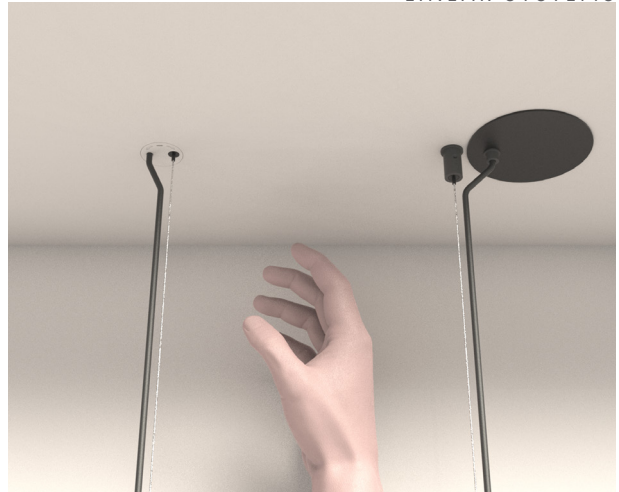


TEC.DRAWINGS

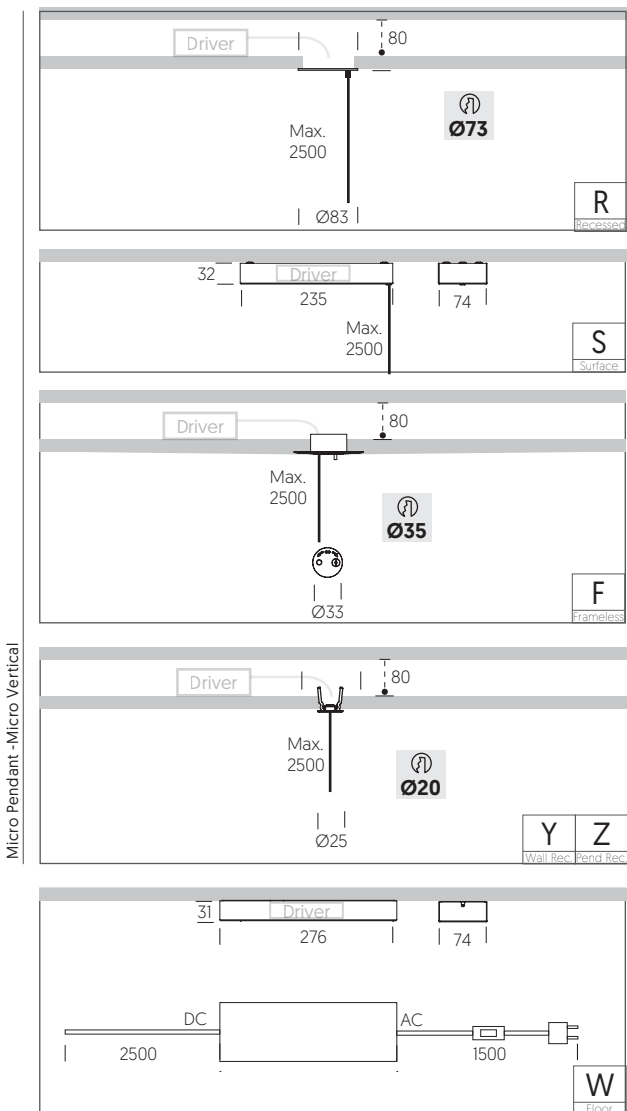

FLORON

Configurador/ Configurator

MAX 80W CE 230V IP20

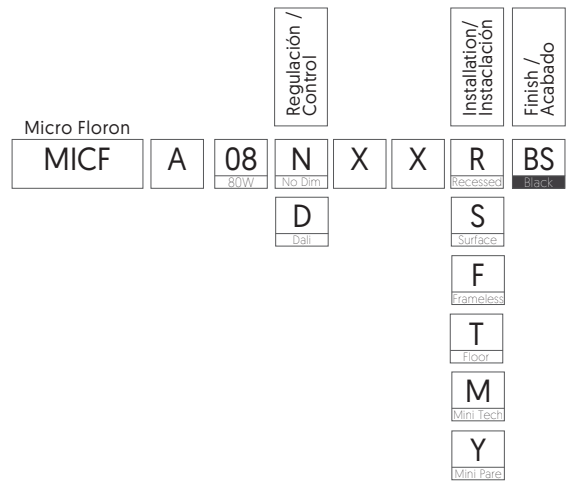

*Un floron puede alimentar max. 4m



MICRO VERTICAL

LINEAR SYSTEMS



	W	mm	v	TEMP	LUM	CRI
MICX_10	21	1000	24V	3.000K	2.100	>90
				4.000K	2.450	
MICX_15	32	1500	24V	3.000K	3.150	>90
				4.000K	3.675	
MICX_20	42	2000	24V	3.000K	4.200	>90
				4.000K	4.900	
MICX_25	53	2500	24V	3.000K	5.250	>90
				4.000K	6.125	

Flujos lumínicos / Flujos luminicos

PROFILE / PERFIL

Configurador/ Configurator



Micro Profile

MICX A 10 X 3 A V BS

10m 3000k Ice Vertical Black

15 1.5m 4 4000k

20 2.0m

25 2.5m

Longitud / Length


Led Color Temperat.

Led Diffuser / Difusor

Installation / Instalación

Finish / Acabado

TEC.DRAWINGS

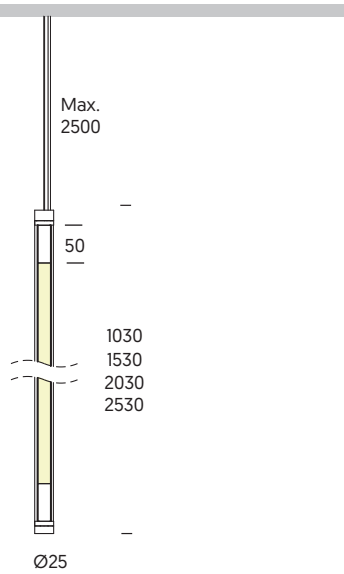

COMPLEMENTOS

LINEAR SYSTEMS

