

# VULCANO ASIMETRIC

## RECESSEDS



	W	mA	TEMP	LUM	CRI
6W	6,2	350	2.700K	570	>90
			3.000K	595	
			4.000K	635	
10W	10,4	300	2.700K	1.005	>95
			3.000K	1.070	
			4.000K	1.135	

GU 10 230V MAX 50W

VLAS	E	50	X	X	X	X	WS
VLAS	E	50	X	X	X	X	BS

GU 5.3 12V MAX 50W


VLAS	D	50	X	X	X	X	WS
VLAS	D	50	X	X	X	X	BS

LED 230V IP33 EXT IP20 INT 50.000h L90/B10 McAdam C2

≈ 6W > 600lm VLAS A 06 . . . 4 . . .

≈ 10W > 1000lm VLAS A 10 . . . . .

### TEC.DRAWINGS

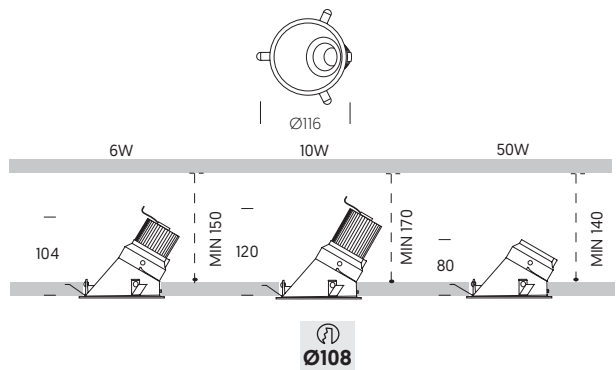

### BASIC OPTIONS

NO DIM	N	No Dimmable								
3K	3	3000K								
4	4	46°								
B	B	Clear Difusser								
WS	WS	Satin White	VLAS	A	..	N	3	4	B	WS
BS	BS	Satin Black	VLAS	A	..	N	3	4	B	BS

### CUSTOMIZE OPTIONS

LED CONTROL										
PUSH	F	Dimmable Push	VLAS	A	..	F	.	.	.	..
DALI	D	Dimmable Dali	VLAS	A	..	D	.	.	.	..
LED COLOR TEMPERATURE										
2.7K	2	2700K	VLAS	A	..	.	2	.	.	..
4K	4	4000K	VLAS	A	..	.	4	.	.	..
LED BEAM ANGLE										
1	1	15°	VLAS	A	10	.	.	1	.	..
2	2	25°	VLAS	A	10	.	.	2	.	..
LED COMPLEMENTS										
A	A	Ice Difusser	VLAS	A	..	.	.	.	A	..

Wifi or Bluetooth version and other colors, please consult it.